

RT-5015/5016

POSIFLEX

Specification	RT-5015	RT-5016
Processor	Intel Skylake Core i3-6100U Dual Core CPU, 2.30 GHz, 3M Cache	
System Memory	DDR4 SO-DIMM slot x 2, max. 16GB	
Storage Device	SATA storage x 2	
Power Supply	12V/80W	
OS Support	Windows 7/POSReady 7/Windows Embedded 8.1 Industry/Windows 10 IoT/Linux per request	
Display & Touch		
LCD	15" TFT LCD	15.6" TFT LCD
Resolution	1024 x 768	1920 x 1080
Touch	True-flat PCAP touch with multi-touch support (IP65 on front panel)	
I/O & Expansion		
Serial Port	3, DB9 x 1 + RJ45 x 2, 5V/12V support on all COM ports	
Standard USB Port	4, USB 3.0 x 2 + USB 2.0 x 2; optional USB extension module to bring total USB port to 7 (USB 3.0 x 1 will no longer be available with the USB extension module)	
PoweredUSB Port	Optional PoweredUSB module with 24V + 12V (USB 3.0 x 1 will no longer be available with the PoweredUSB module)	
LAN Port	10/100/1000 Mb x 1	
Display Port	VGA via proprietary connector (12V support for Posiflex monitors) x 1 + mini DP x 1	
CR Port	1, control 2 CR via optional Y-cable, supporting 24V cash drawer	
Audio	Internal 2W speaker x 1	
Expansion Slot	M.2 slot x 1	
Physical Dimension		
Dimension (W x D x H in mm)	368 x 207 x 325	402 x 207 x 297
Weight (N. W. in kg)	5.4	5
Environmental		
Operating Condition	0°C - 40°C, 20%RH - 90%RH (Equipped with HDD); 0°C - 50°C, 20%RH - 90%RH (Equipped with SSD)	
Storage Condition	-20°C - 70°C, 10%RH - 90%RH	
Built-in Options		
WiFi	M.2 WiFi/BT module	
Camera	2MP	
AG Glass	Cannot co-exist with built-in camera	
Attachment Options		
POS Monitor	9.7"/10.1" TFT LCD display [touch/non-touch]	



Make Your Business Look More Attractive

RT-5015/5016

Fanless POS Terminal

Authorized Australian Distributor: Goodson Imports Pty Ltd. Representation in all main States and New Zealand,
Head Office: 9 Liberty Road, Huntingwood NSW 2148, Sydney Australia
Ph: 02-8875 4544 Fax 02-8875 4588, www.goodson.com.au

* Designed and Manufactured in Taiwan by Posiflex Technology, Inc.
* The product information and specifications are subject to change without prior notice.
* Please refer to the website for more attachment options.



POSIFLEX

POSIFLEX TECHNOLOGY, INC.


No. 23, Datong St., Tucheng Dist., New Taipei City 23679, Taiwan
Tel : +886-2-2268-5577 E-mail : sales@posiflex.com.tw
Fax : +886-2-2268-5388 www.posiflex.com

Authorized Distributor / Reseller

The **RT-5000 Series** radiates in its new design - featuring an ultra-slim and sleek look that exhibits elegance. It is uncompromising to the space requirements and provides better cable management and easy maintenance. The new RT-5000 Series is taking POS terminal design into the next level and setting your brand image apart from the others.



Full HD
15.6" ONLY

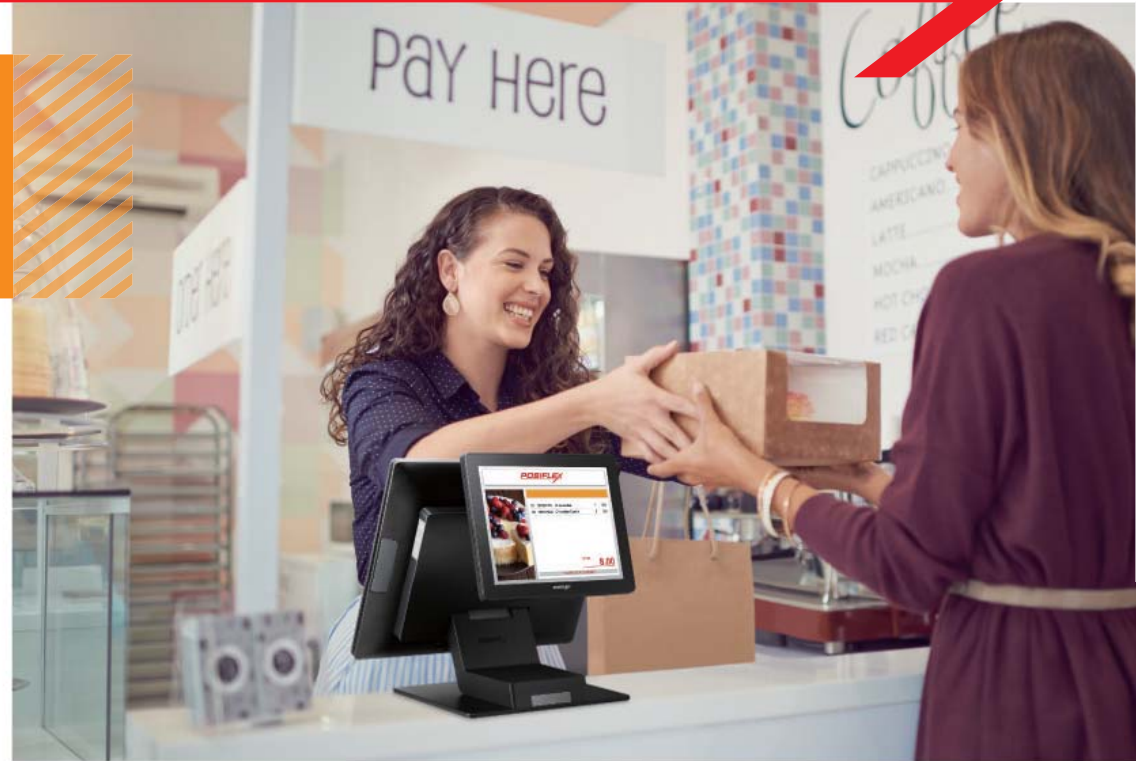

Slim & Stylish Look

With stylish, fluid contours for its base and true-flat design, the RT-5000 Series has 15" or 15.6" PCAP touch screen, and full suite of ports that are hidden in the clean rear cover. No screws can be found on its surface maintaining the neat and sleek look.

Patented Fanless Technology

The RT-5000 Series is built to perform in harsh environments that involve dust and liquid spills. Its patented fanless technology allows the unit to run silently and eliminates a potential point of failure, thus reducing service costs.



Fanless
Technology



Dust
Resistant



Water
Resistant



Money
Saving



Clean Cable Management

A unique cabling system (I/O expansion are centralized and hidden in the rear cover) delivers a truly clutter-free station. The standard base can house the optional PoweredUSB module or USB extension module. There is no need to change to a larger base, while retaining the sleek look.



Expandable
USB Module



Maintenance & Shipment With Ease

Its rear cover can be easily and toollessly removed, which allows for easy installation, maintenance and upgrade. The unit can be shipped with customer line display or 10" 2nd customer facing LCD display attached and folded to lessen the deployment effort, at the same time saving the package volume.