


Nexa CM-500W

Bluetooth Barcode Scanner

Specifications

Battery Life	15,000 scans (One scan per 5 seconds)
Support Barcodes	Code 39, INT 25, Industrial 2 of 5, Matrix 2 of 5, Codabar (NW7), Code 93, Code 128, EAN 128, JAN/EAN/UPC and GS1 Databar).
Min. PCS Value	0.45
Scan Engine Information	630nm Red LED LAMP, Linear CCD Image Sensor Scan Rate: 100 scans/sec Scan Distance: 5cm to 25cm depending on barcode size
Main Battery	Built in Rechargeable Li-Polymer battery pack.,(3.7V, 420mAH)
Keys	2 keys, 1 for scan, 1 for toggle on screen keyboard on iOS.
LED Indicator	1 LED 2 colors (green and orange) for good read or memory full, 1 LED (red) for low battery.
Beep Indicator	Buzzer can be disabled or enabled by configuration barcodes
Temperature In Operation	14 to 104° F
Environment Humidity	10%-90% RH
Certification	FCC / CE / RoHS approved
Dimensions	89mm (L) x 40mm (W) x 18.5mm (H)
Weight	75g
Power Consumption	90mA

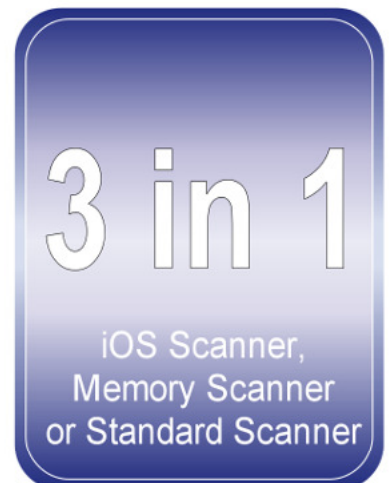

NEXA

Visit www.nexapos.com to find out about other exciting Nexa products!

